

22 HALO SAL
LIGHTING



EXPERTS IN LIGHTING SOLUTIONS

22 HALO SAL
LIGHTING

LIGHTING
CATALOGUE
2024/25

22 HALO SAL
LIGHTING




SUPERSLIM

SYSTEM

2024




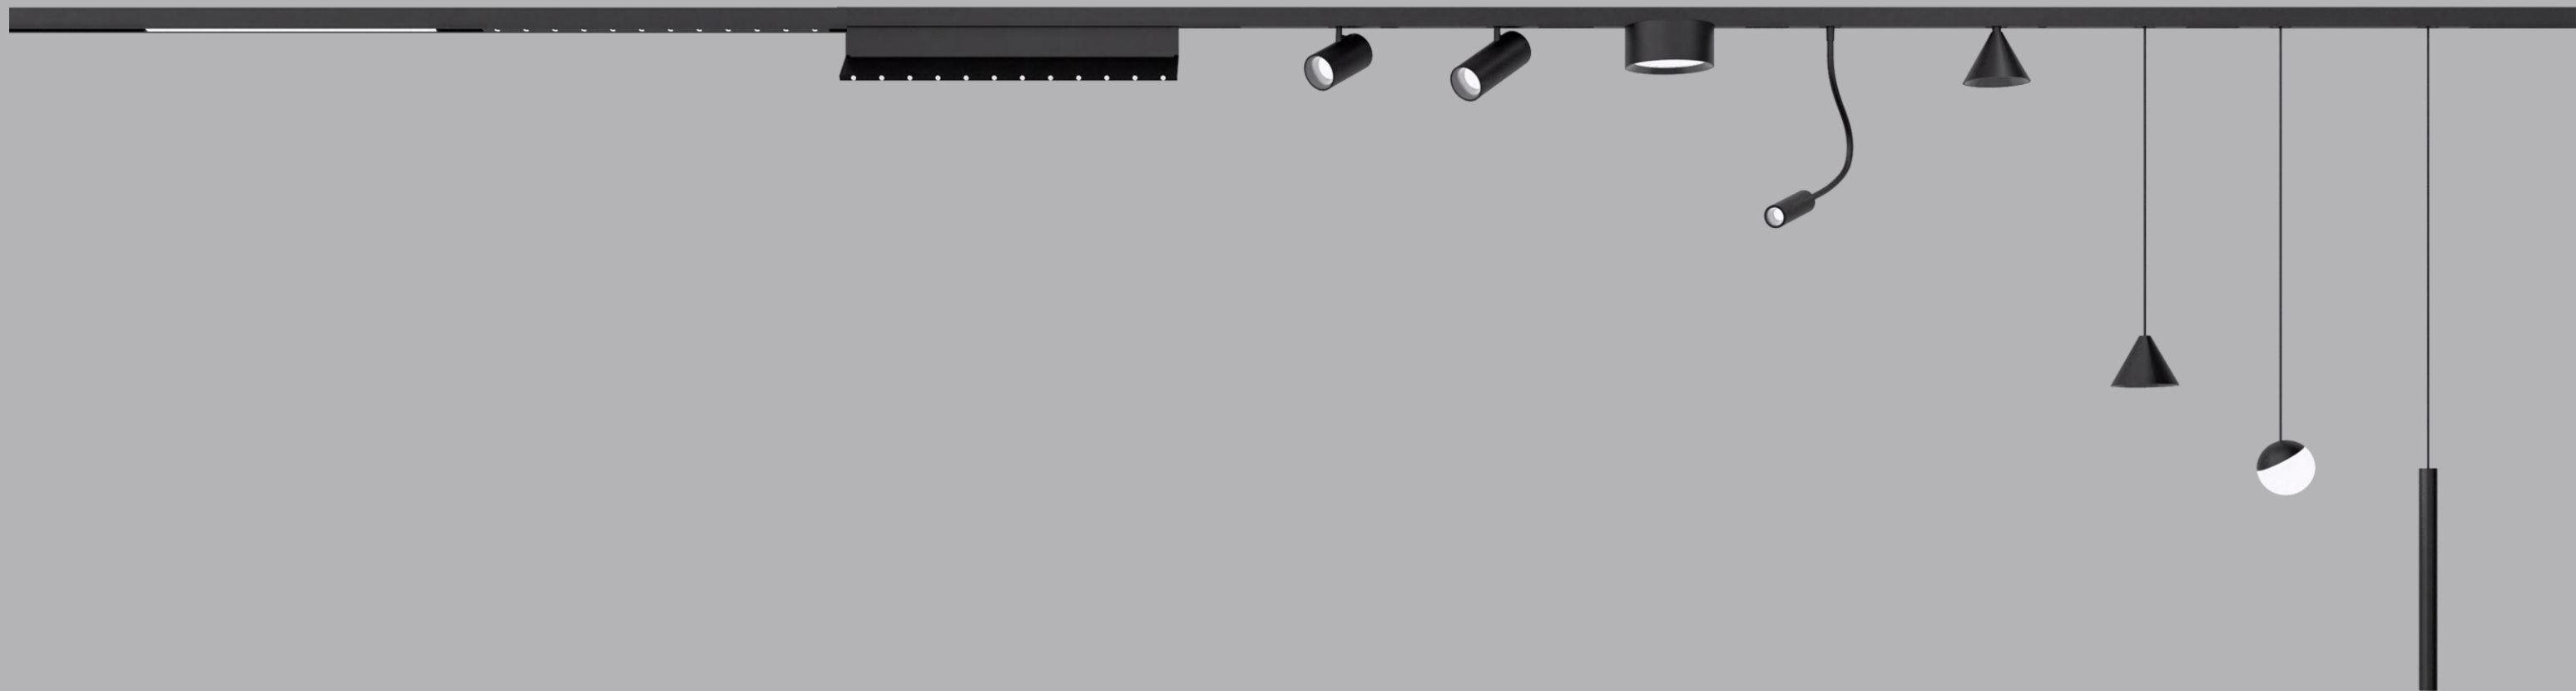




Evolutional
LED Lighting
Commercial






SUPERSLIM TRACK




			
Produc tCode	Material	Finish	Size(mm)
SPS-S5	Aluminum	● ○	L1000xW11xH17 L2000xW11xH17 L3000xW11xH17

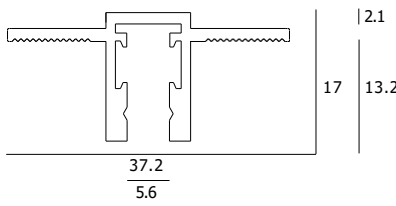			
Produc tCode	Material	Finish	Size(mm)
SPS-R5	Aluminum	● ○	L1000xW37.2xH17 L2000xW37.2xH17 L3000xW37.2xH17

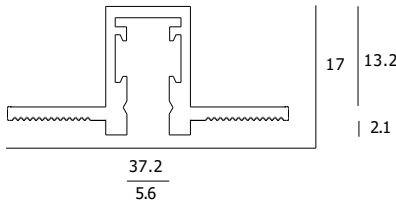
			
Produc tCode	Material	Finish	Size(mm)
SPS-RF5	Aluminum	● ○	L1000xW37.2xH17 L2000xW37.2xH17 L3000xW37.2xH17

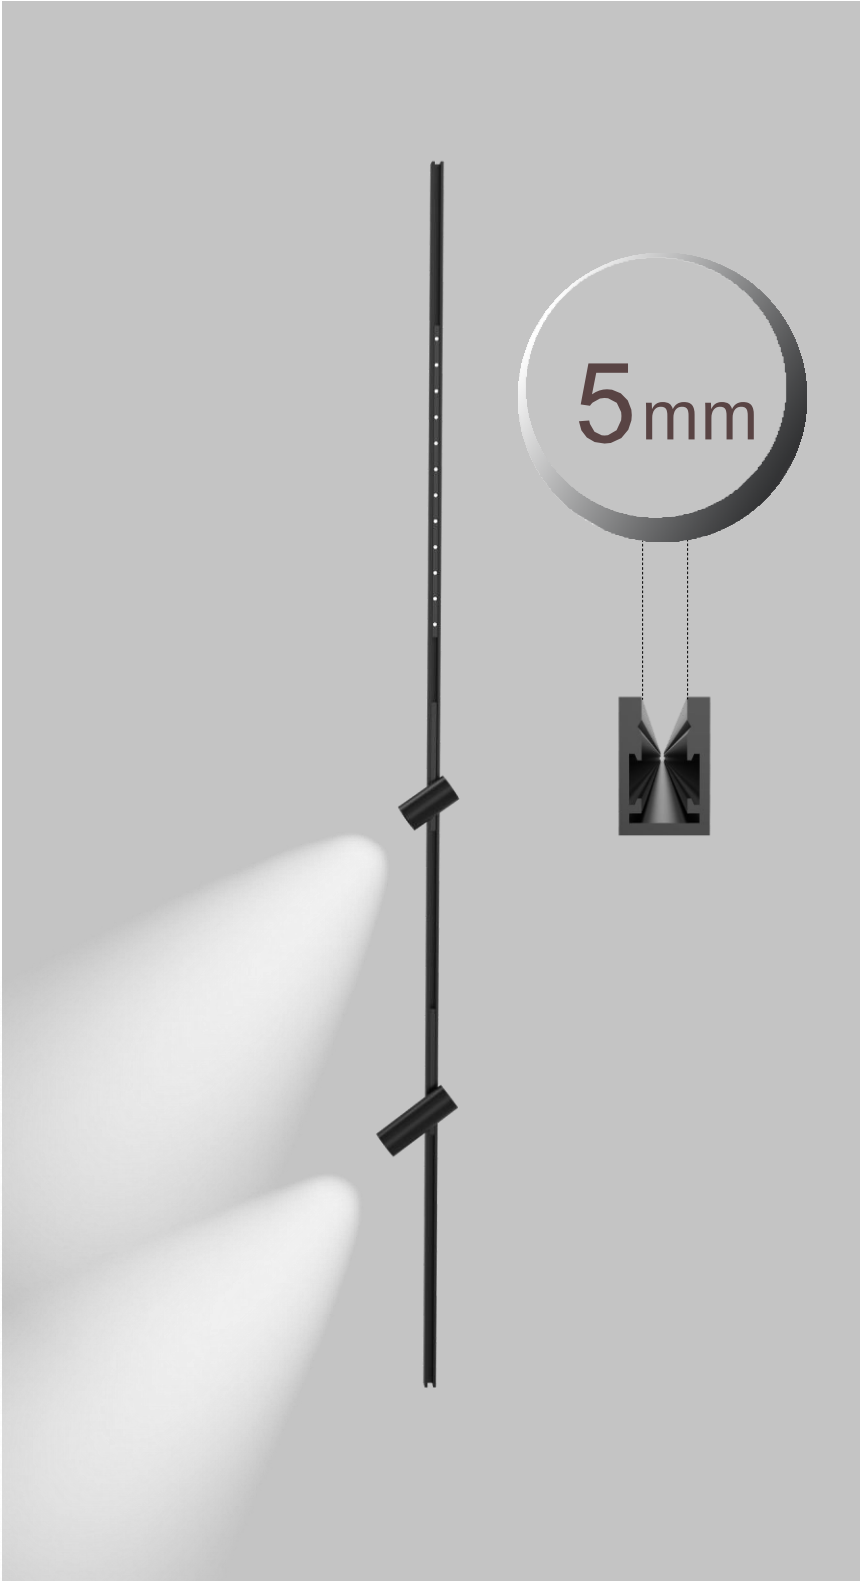


SUPERSLIM Multiple module connection

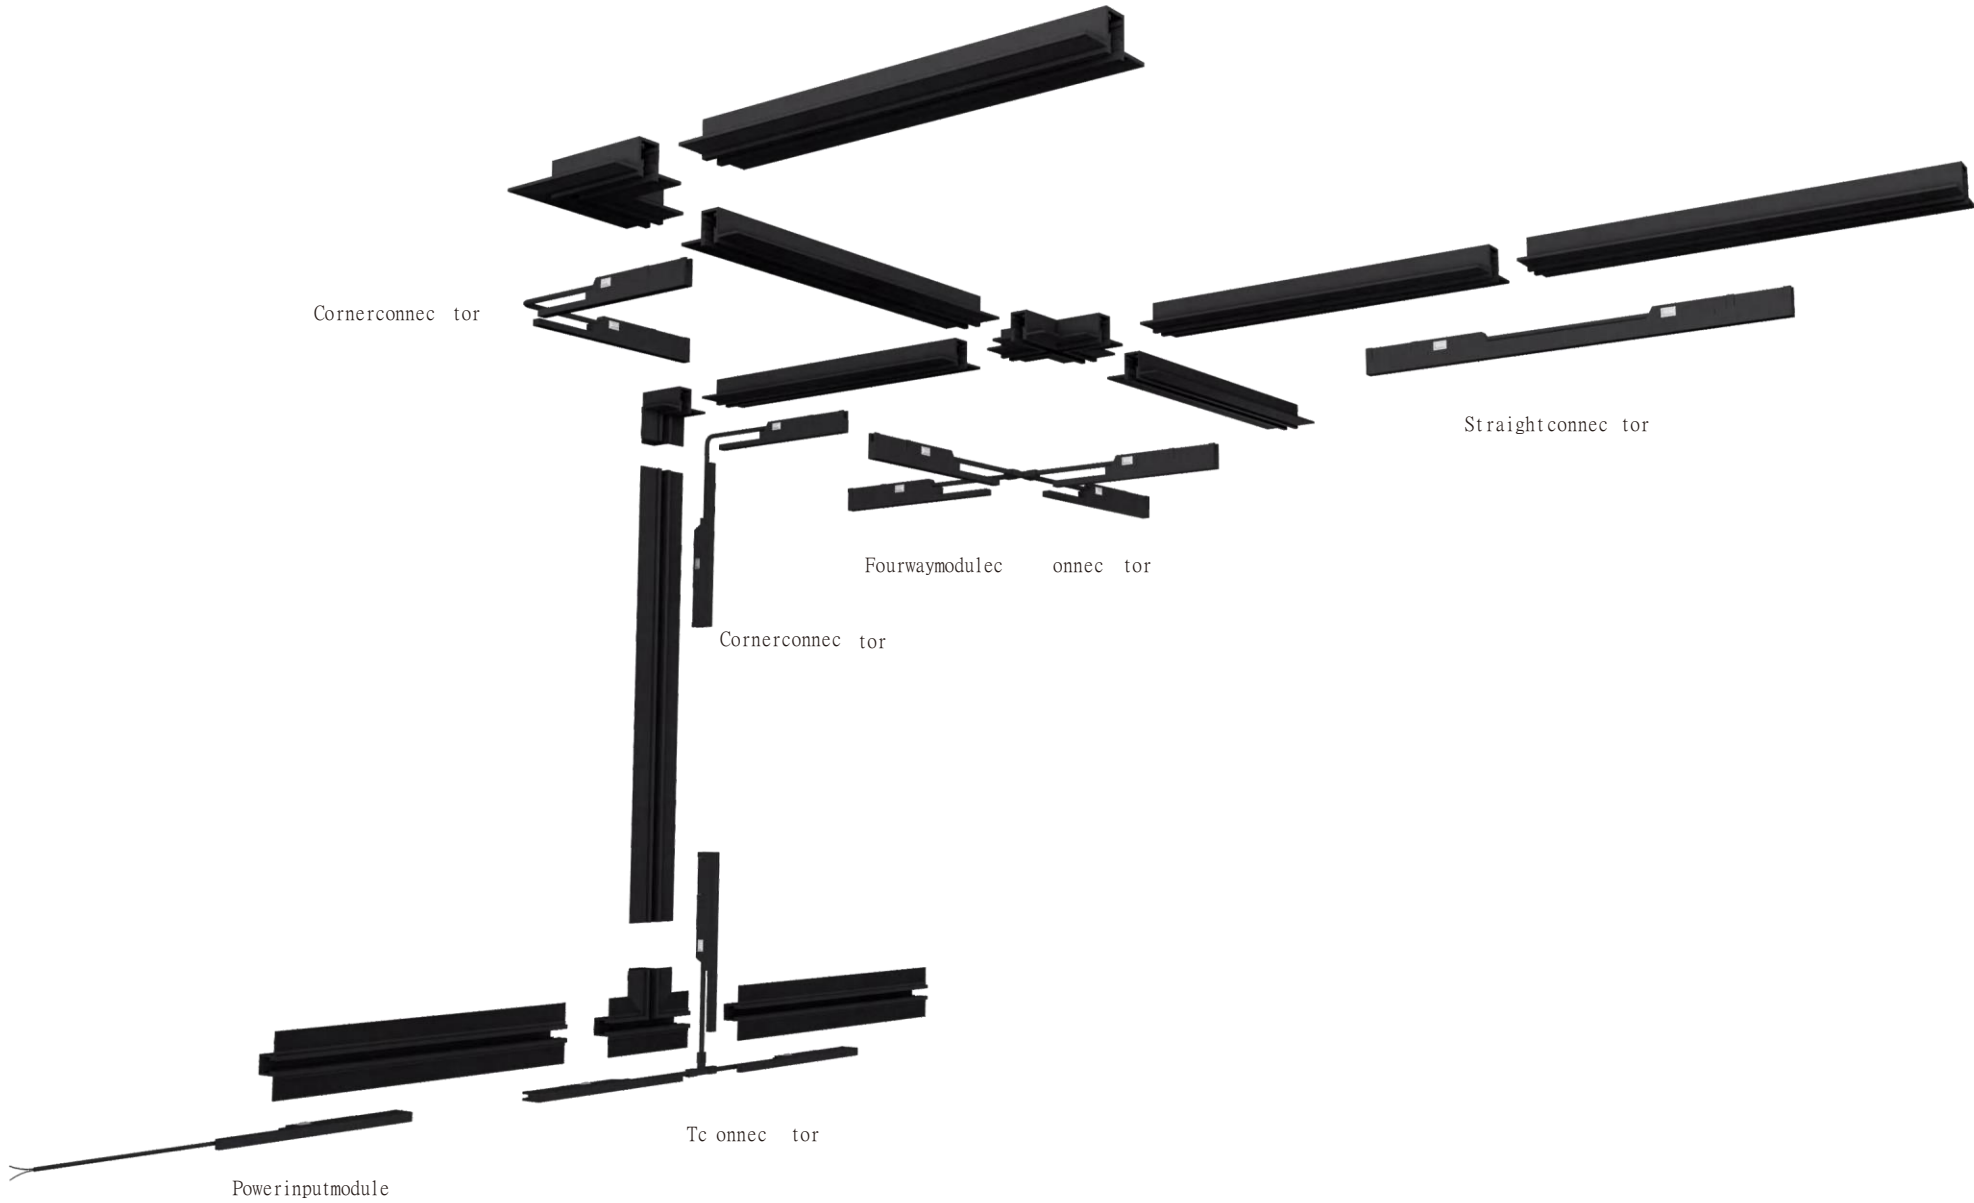


Powerinputmodule
Size: L100xW5xH14mm



Straightconnec tor
Size: L200xW5xH14mm




Cornerconnec tor
Size: L215xW5xH14mm




Tc onnec tor
Size: L260xW5xH14mm



Fourwaymodulec onnec tor
Size: L260xW5xH14mm

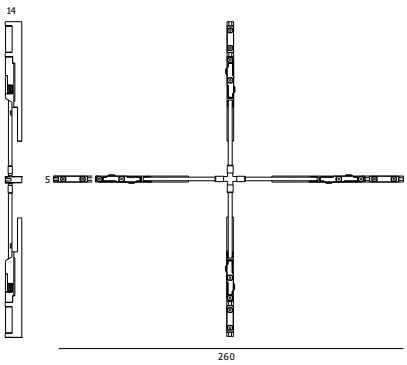


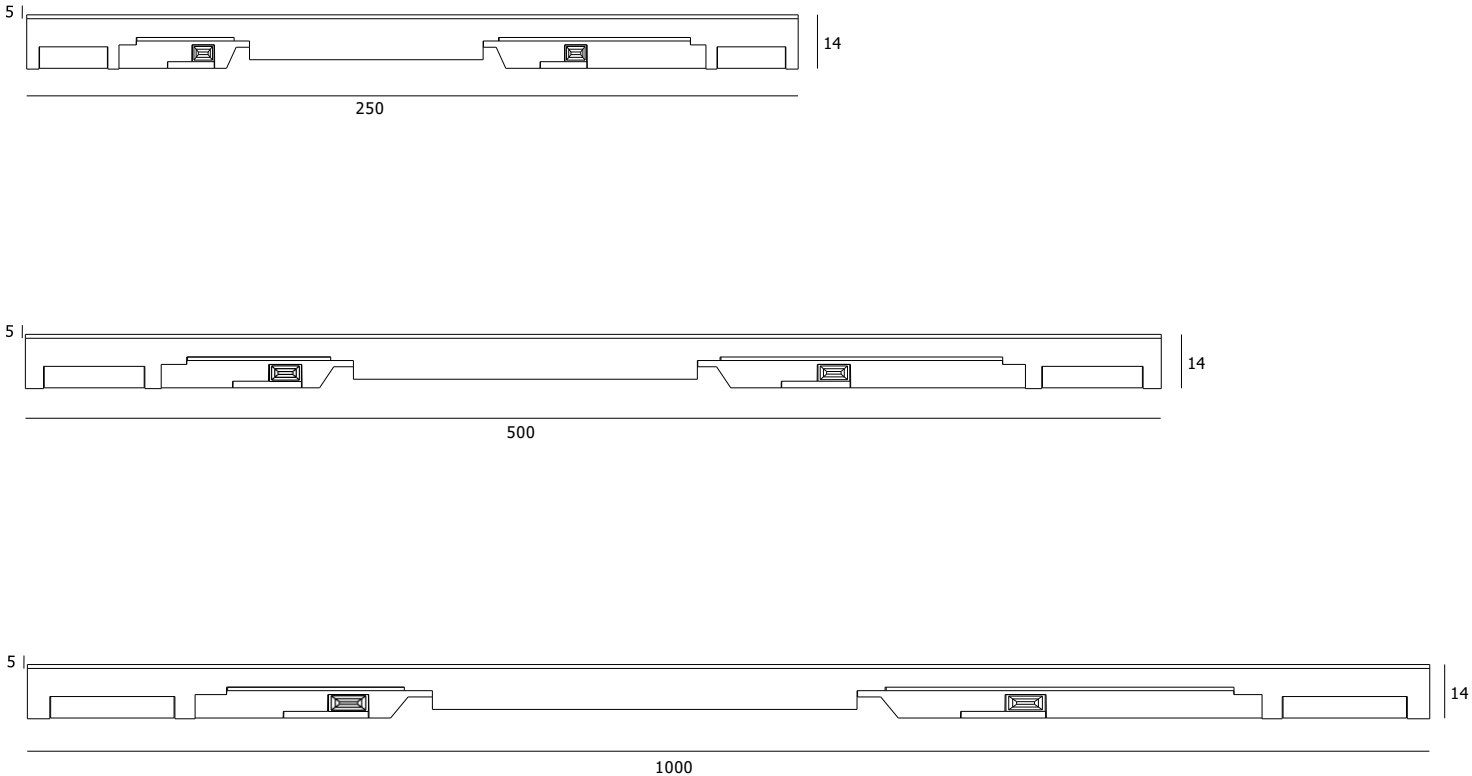


Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-FL250	6W	Ra90	48V	250x5x14	BK WH	2700K	O-10V
SPS-FL500	12W	Ra90	48V	500x5x14		3000K	TUYA
SPS-FL1000	24W	Ra90	48V	1000x5x14		4000K	DALI
						5000K	

Beam angle


Light distribution curve

Light distribution curve

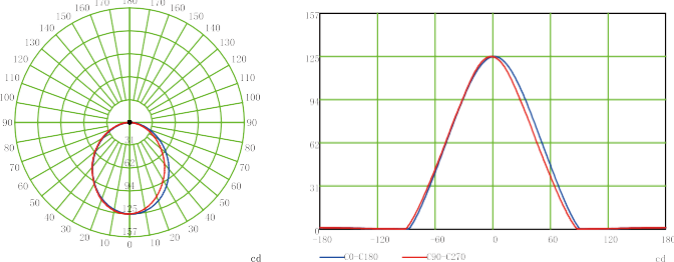

SUPERSLIM

SPS LINE

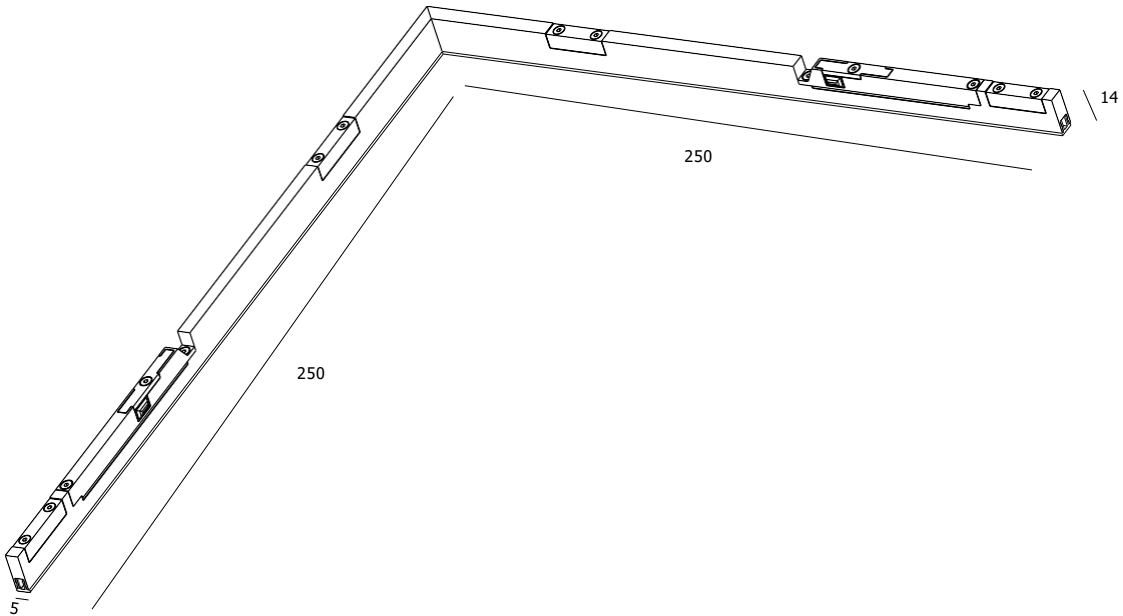

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-FL-90°

12W

Ra90

48V

250x250x5x14

- BK
- WH

2700K
3000K
4000K
5000K



O-10V
TUYA
DALI



Beam angle

Light distribution curve



100°

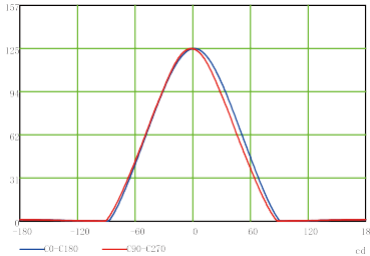


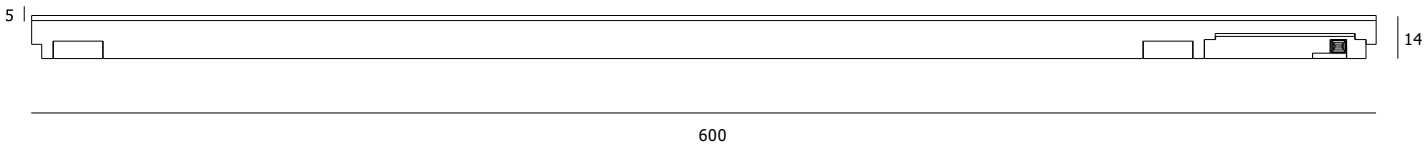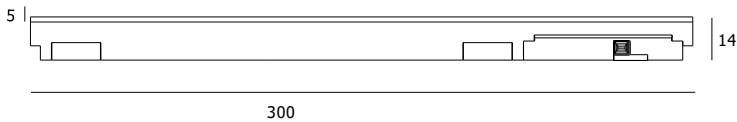



Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-GL12	8W	Ra90	48V	300x5x14	BK	2700K	O-10V
SPS-GL24	16W	Ra90	48V	600x5x14	WH	3000K	TUYA
						4000K	DALI
						5000K	


Beam angle

Light distribution curve



60°

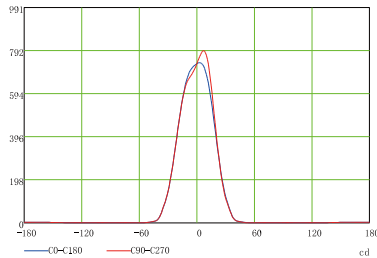

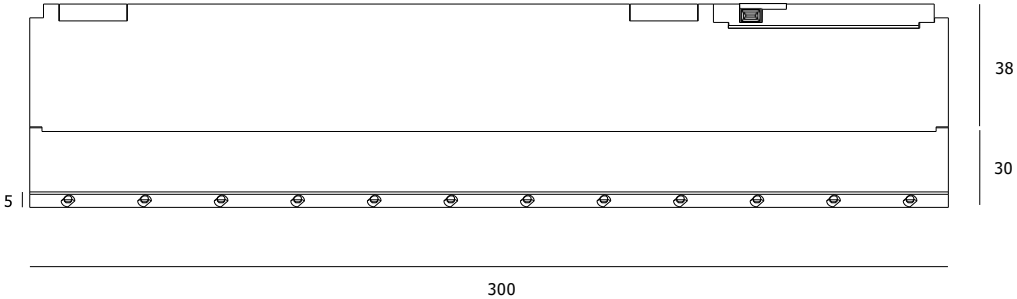

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-GLM12

8W

Ra90

48V

300x5x68



BK



WH

2700K

3000K

4000K

5000K

O-10V

TUYA



DALI

Beam angle

Light distribution curve




60°

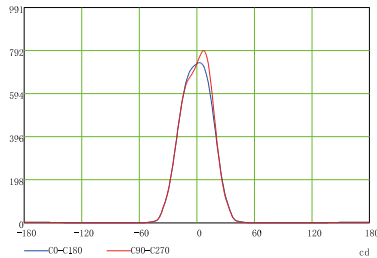

SUPERSLIM

SPS LOCUS SUPER SPOT



Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-SL4

4W

Ra90

48V

Φ 28x54x126

- BK
- WH

- 2700K
- 3000K
- 4000K
- 5000K



- O-10V
- TUYA
- DALI

Beam angle

Light distribution curve




50°

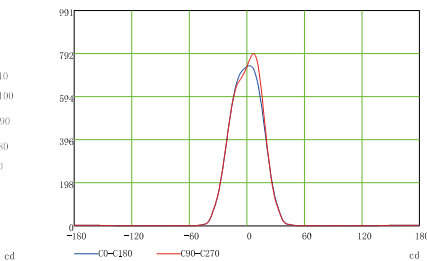

SUPERSLIM



SPS LOCUS SUPER SPOT

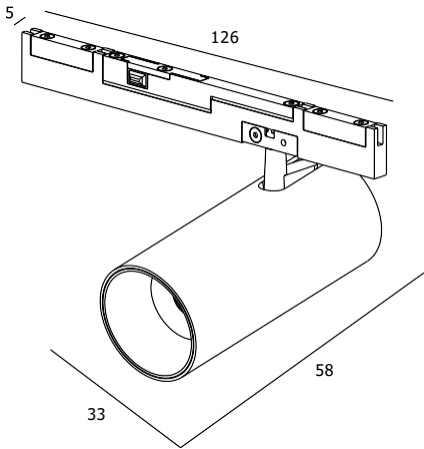

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-SL7	7W	Ra90	48V	Φ34x58x126	BK WH	2700K 3000K 4000K 5000K	O-10V TUYA DALI


Beam angle

Light distribution curve

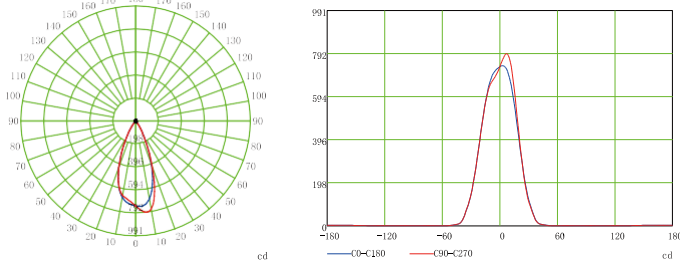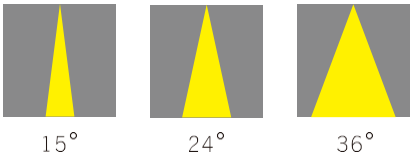

SUPERSLIM

SPS LOCUS SUPER SPOT

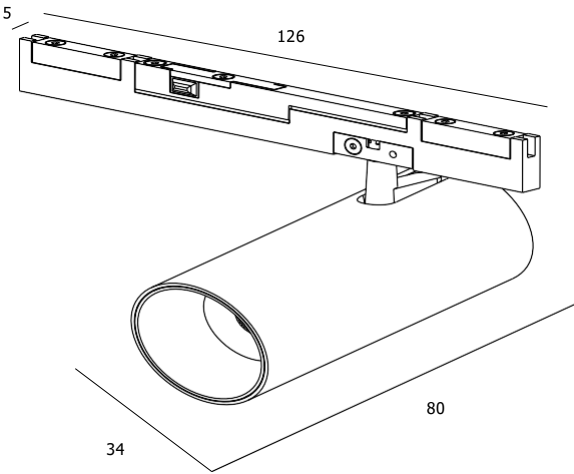

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-SL10

10W

Ra90

48V

Φ 34x80x126



- BK
- WH

- 2700K
- 3000K
- 4000K
- 5000K

- O-10V
- TUYA
- DALI


Beam angle

Light distribution curve

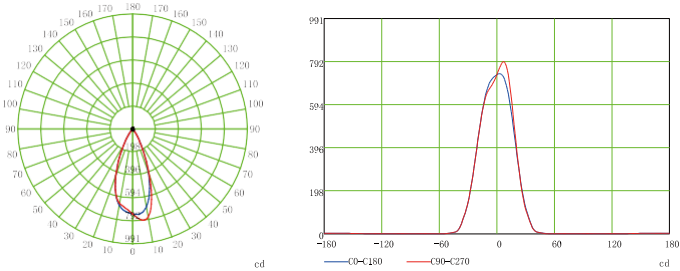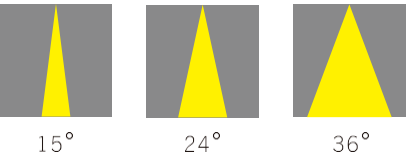

SUPERSLIM

SPS FLEX VISION

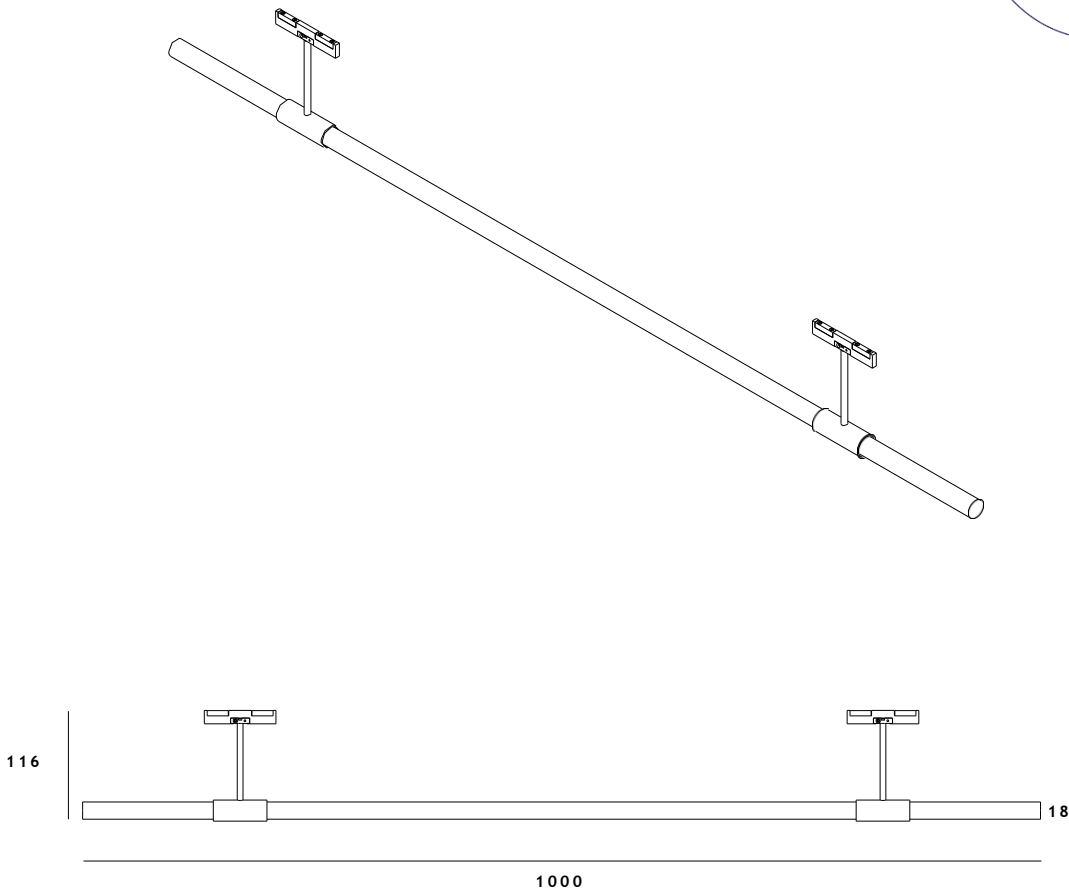

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-NEON-1000

18W

Ra90

48V

Φ 18*L1000

- BK
- WH

2700K
3000K
4000K
5000K

O-10V
TUYA
DALI

Beam angle




360°



SUPERSLIM



SPS LOCUS FLEX

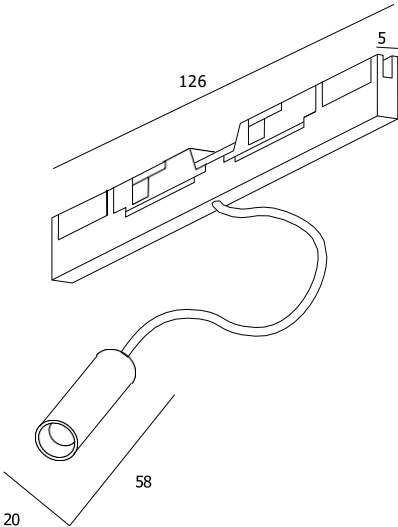

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-LF2	2W	Ra90	48V	Φ 20x58x126	BK WH	2700K 3000K 4000K 5000K	O-10V TUYA DALI


Beam angle

Light distribution curve

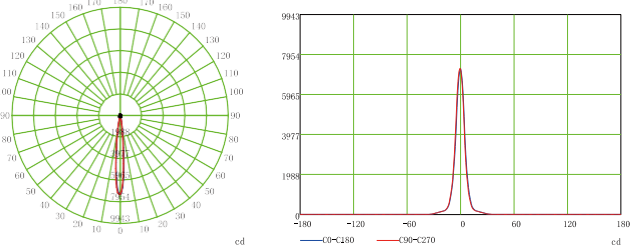

SUPERSLIM

SPS LOCUS FLEX

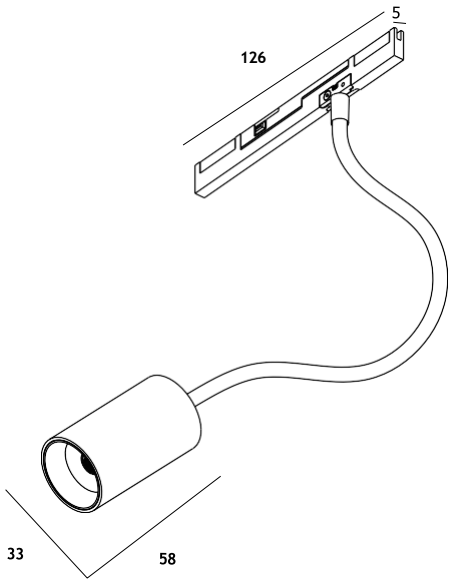

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-LF4

4W

Ra90

48V

Φ 34x58x126



- BK
- WH

2700K
3000K
4000K
5000K

O-10V
TUYA
DALI


Beam angle

Light distribution curve

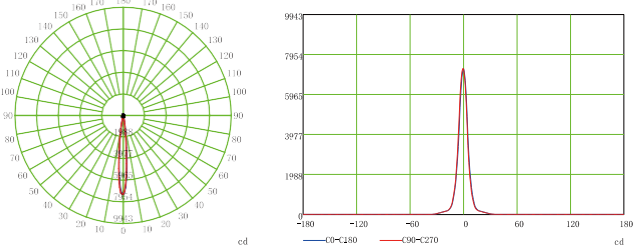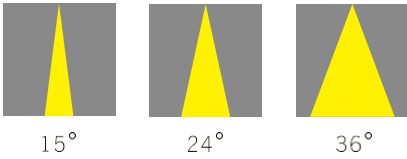

SUPERSLIM

SPS LOCUS PDNT

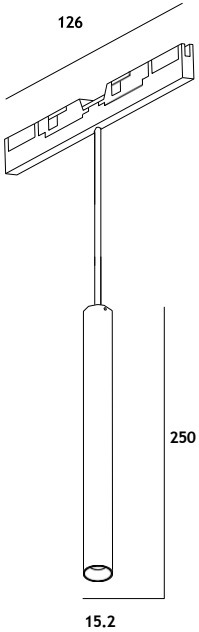

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-PLA250

2W

Ra90

48V

Φ 15.2x250x126

- BK
- WH

2700K
3000K
4000K
5000K

O-10V
TUYA
DALI

Beam angle



15°



24°




36°



SUPERSLIM

SPS LOCUS PDNT

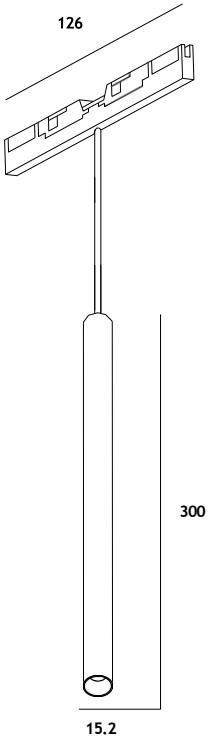

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-PLA300

2W

Ra90

48V

Φ 15.2x300x126

- BK
- WH

- 2700K
- 3000K
- 4000K
- 5000K

- O-10V
- TUYA
- DALI

Beam angle



15°



24°




36°



SUPERSLIM

SPS CONE PDNT

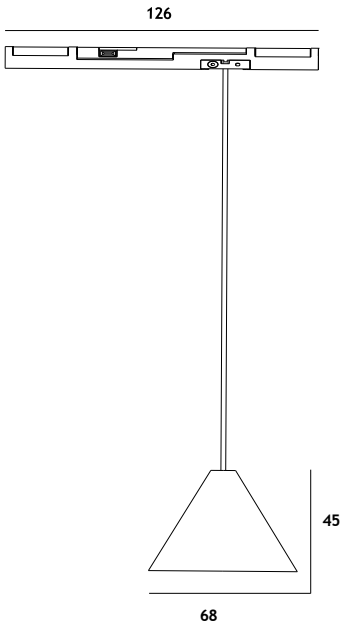

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-CL-A

4W

Ra90

48V

Φ 68x45x126

- BK
- WH

- 2700K
- 3000K
- 4000K
- 5000K

- O-10V
- TUYA
- DALI

Beam angle




50°



SUPERSLIM

SPS CONE PDNT

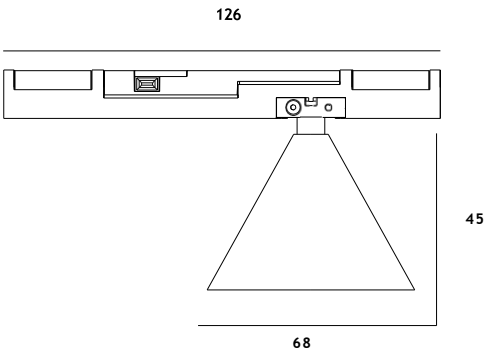

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-CL-B

4W

Ra90

48V

Φ 68x45x126

- BK
- WH

2700K
3000K
4000K
5000K


O-10V
TUYA
DALI

Beam angle




50°



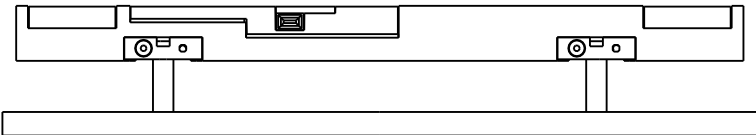

192

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-LP200	10W	Ra90	48V	Φ 192	BK	2700K	O-10V
					WH	3000K	TUYA
						4000K	DALI
						5000K	

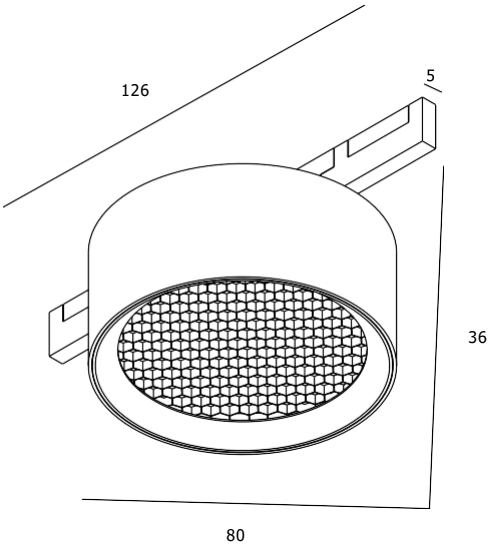

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-SDL10

10W

Ra90

48V

Φ 80x36*126



- BK
- WH

2700K
3000K
4000K
5000K

O-10V
TUYA
DALI


Beam angle

Light distribution curve

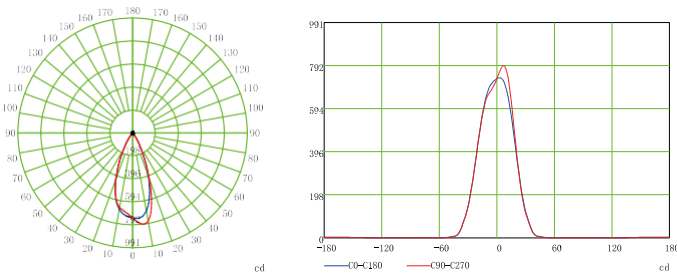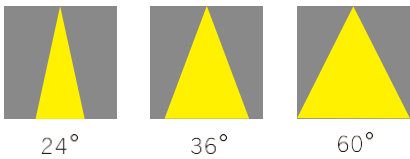

SUPERSLIM

SPS LOCUS

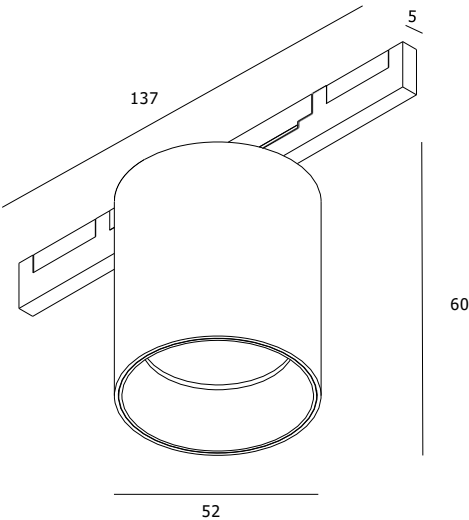

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-SDH10

10W

Ra90

48V

Φ 52x60*137



- BK
- WH



2700K
3000K
4000K
5000K

O-10V
TUYA
DALI

Beam angle

Light distribution curve

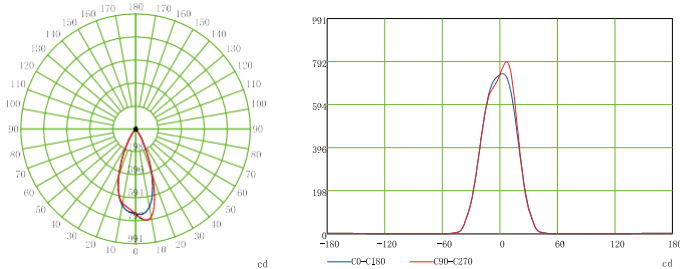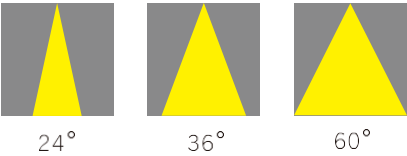

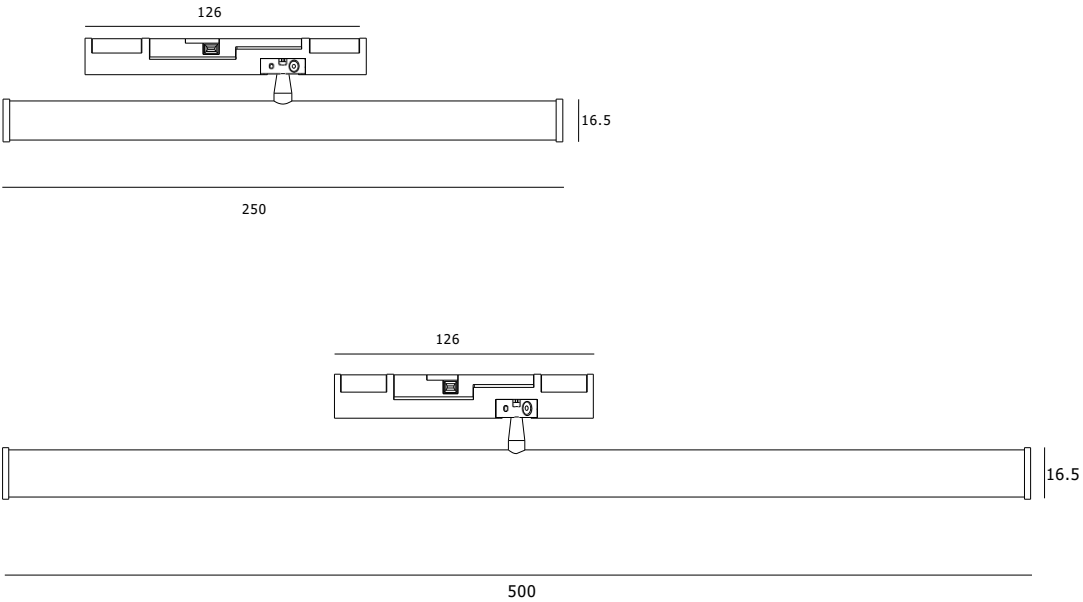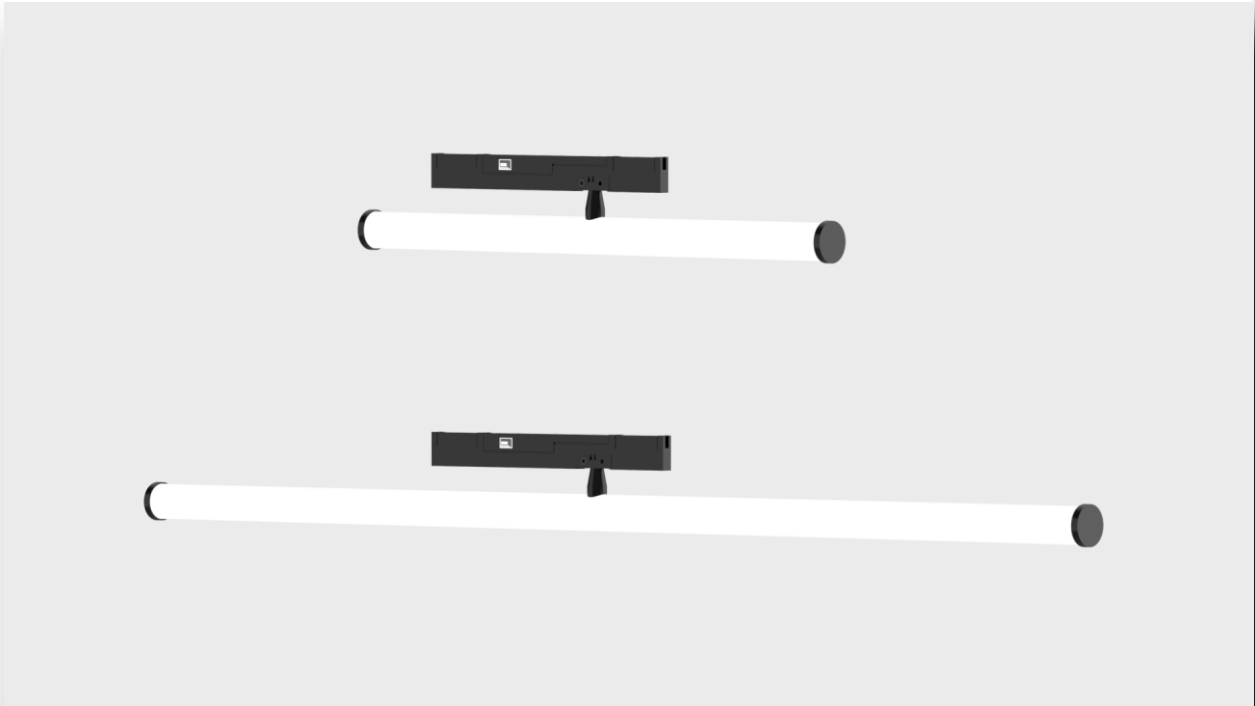

Product Code	Watt	>CRI	Voltage	Product Size	Finish	CCT	System Options
SPS-TB300	5W	Ra90	48V	Φ 16.5x250*126	BK	2700K	O-10V
SPS-TB500	10W	Ra90	48V	Φ 16.5x500*126	WH	3000K	TUYA
						4000K	DALI
						5000K	


Beam angle



100°

SUPERSLIM

SPS BALL

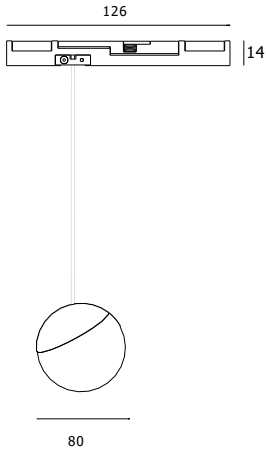

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-BP-2

7W

Ra90

48V

Φ80x14X126

- BK
- WH

- 2700K
- 3000K
- 4000K
- 5000K

- O-10V
- TUYA
- DALI

Beam angle





100°



SUPERSLIM

SPS BALL

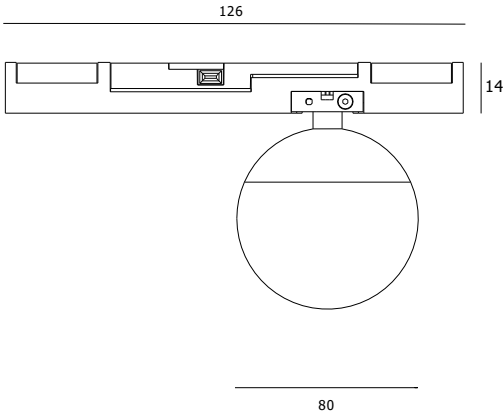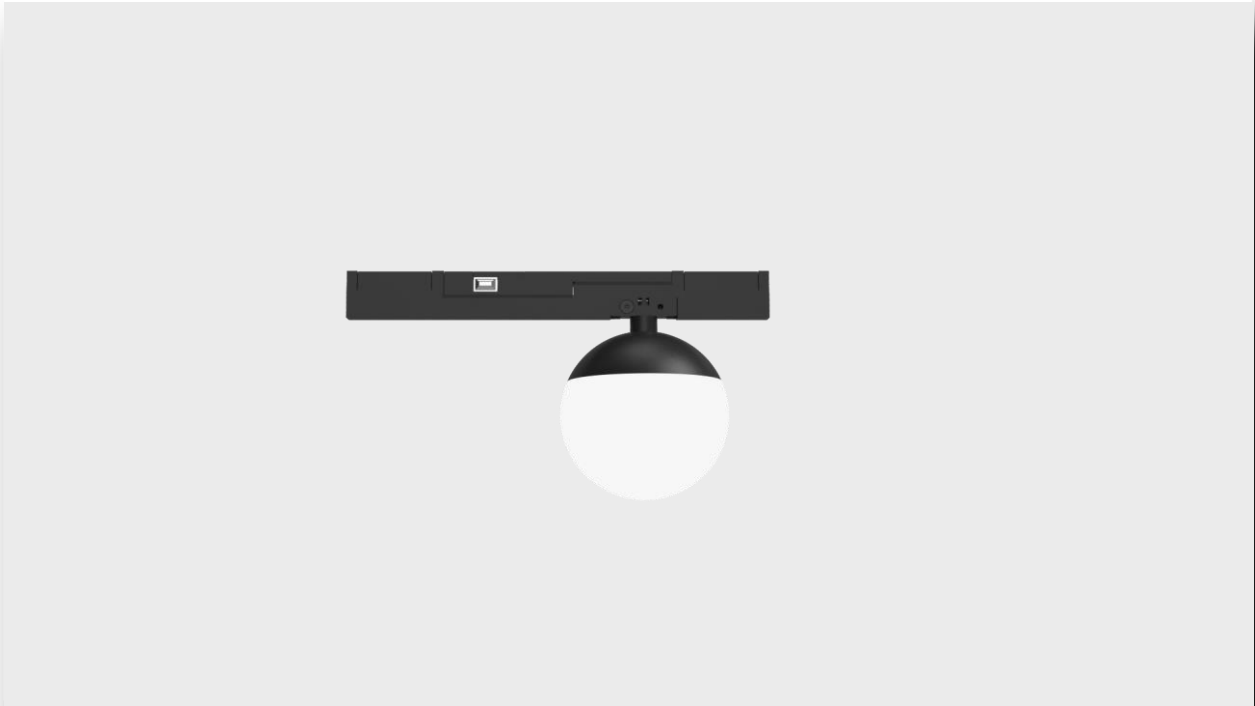

Product Code

Watt

>CRI

Voltage

Product Size

Finish

CCT

System Options

SPS-BP

7W

Ra90

48V

Φ80x14X126

- BK
- WH

2700K
3000K
4000K
5000K

O-10V
TUYA
DALI

Beam angle




100°









48V POWER SUPPLY

Product Code	Watt	Finish	Warranty
Inbuilt driver	100W	BK WH	3 YEARS
Inbuilt driver	200W	BK WH	3 YEARS

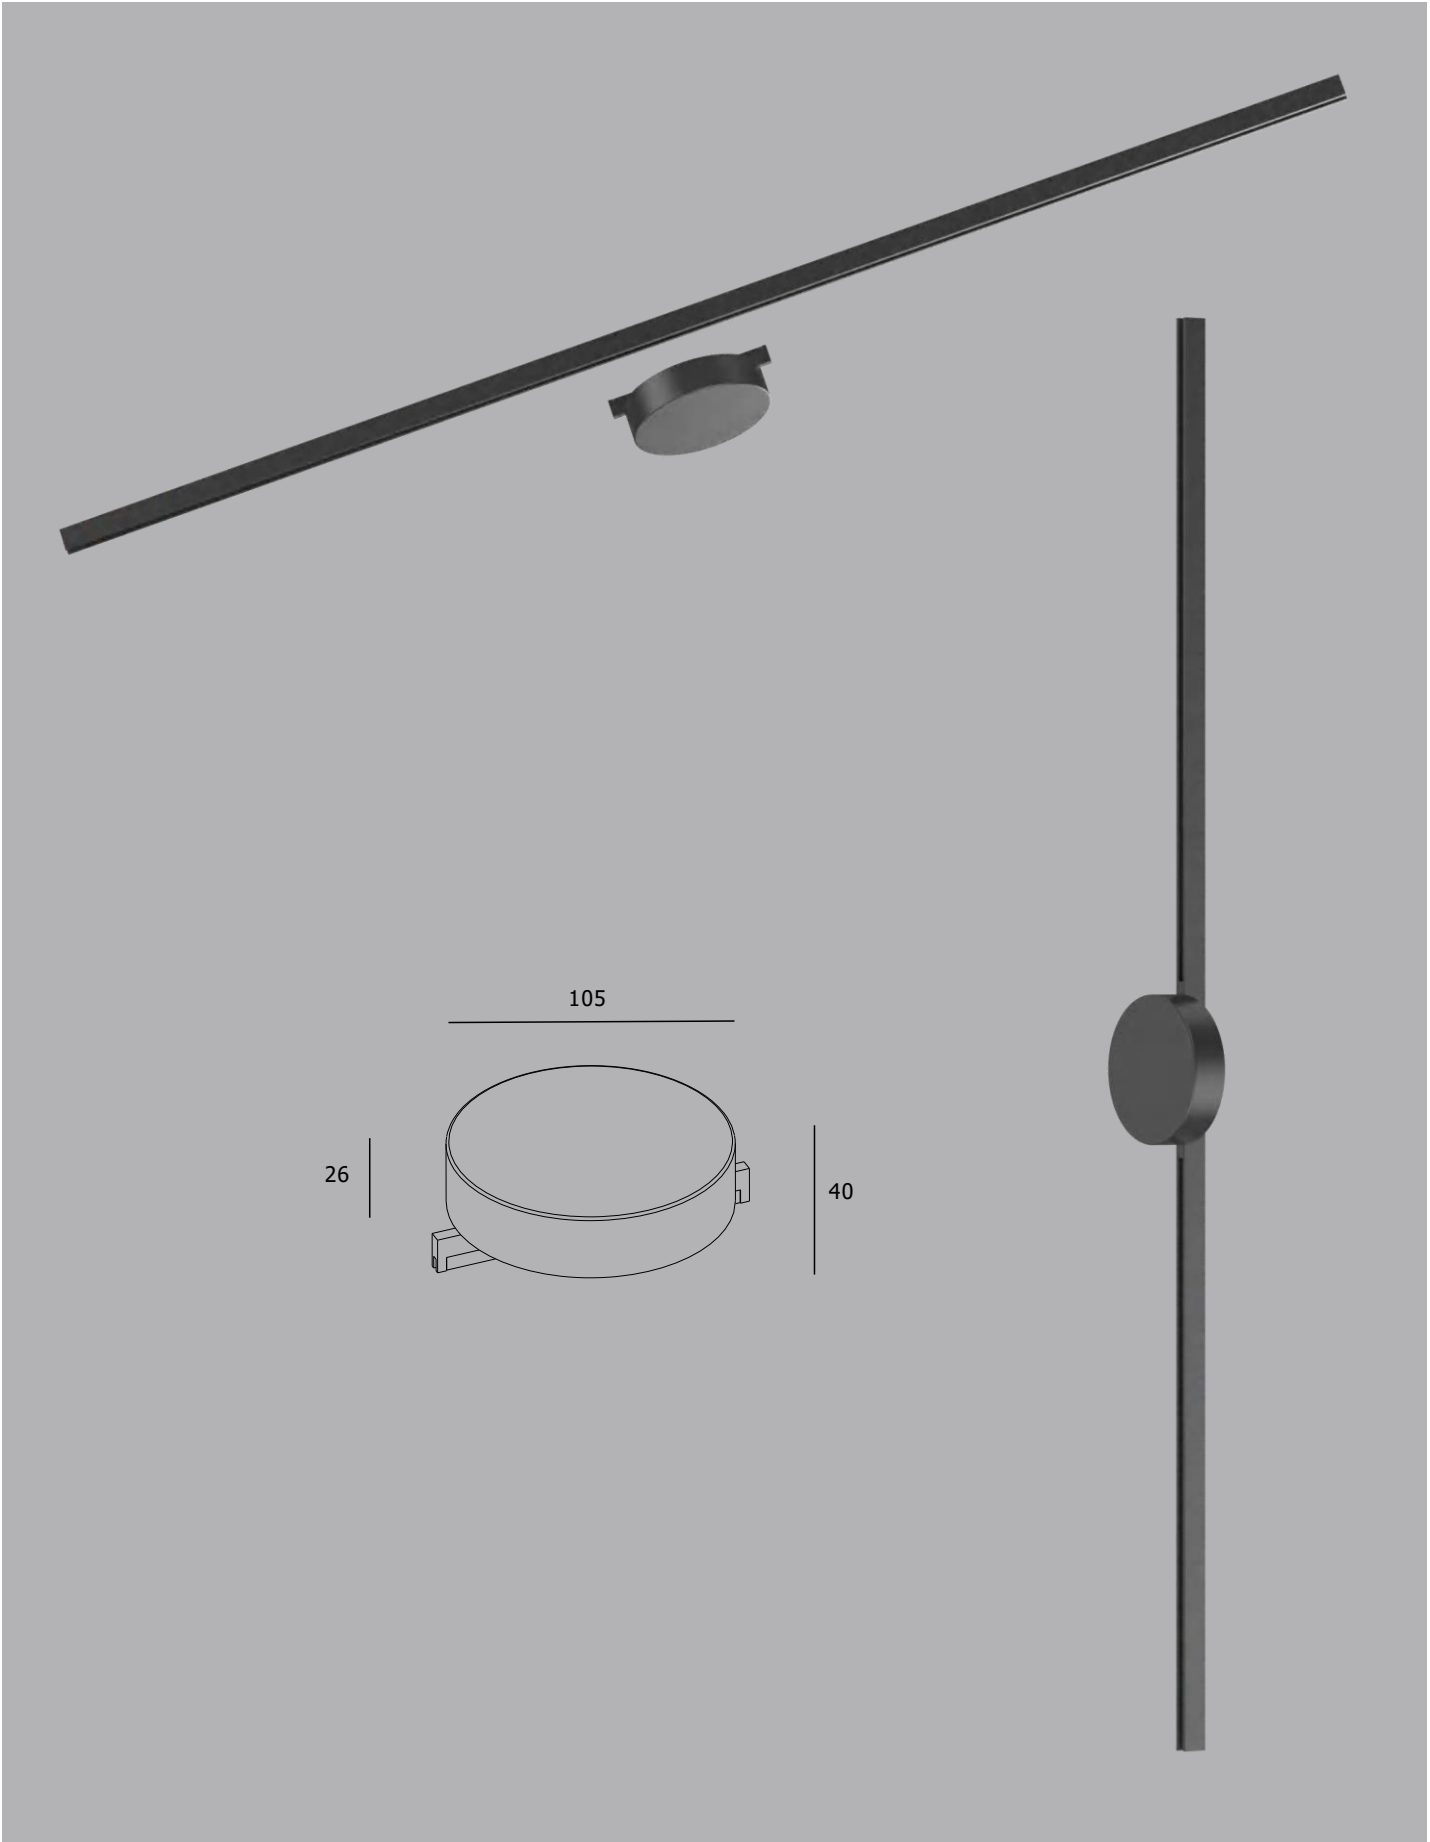

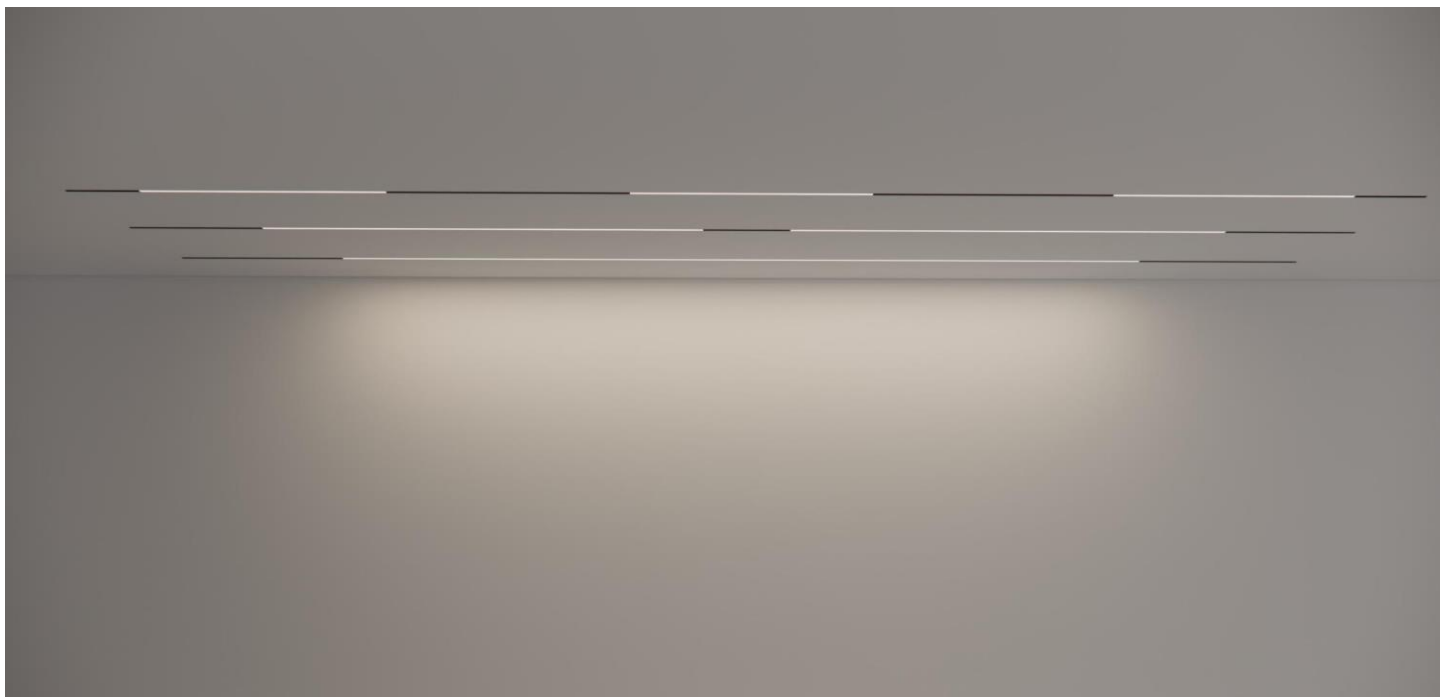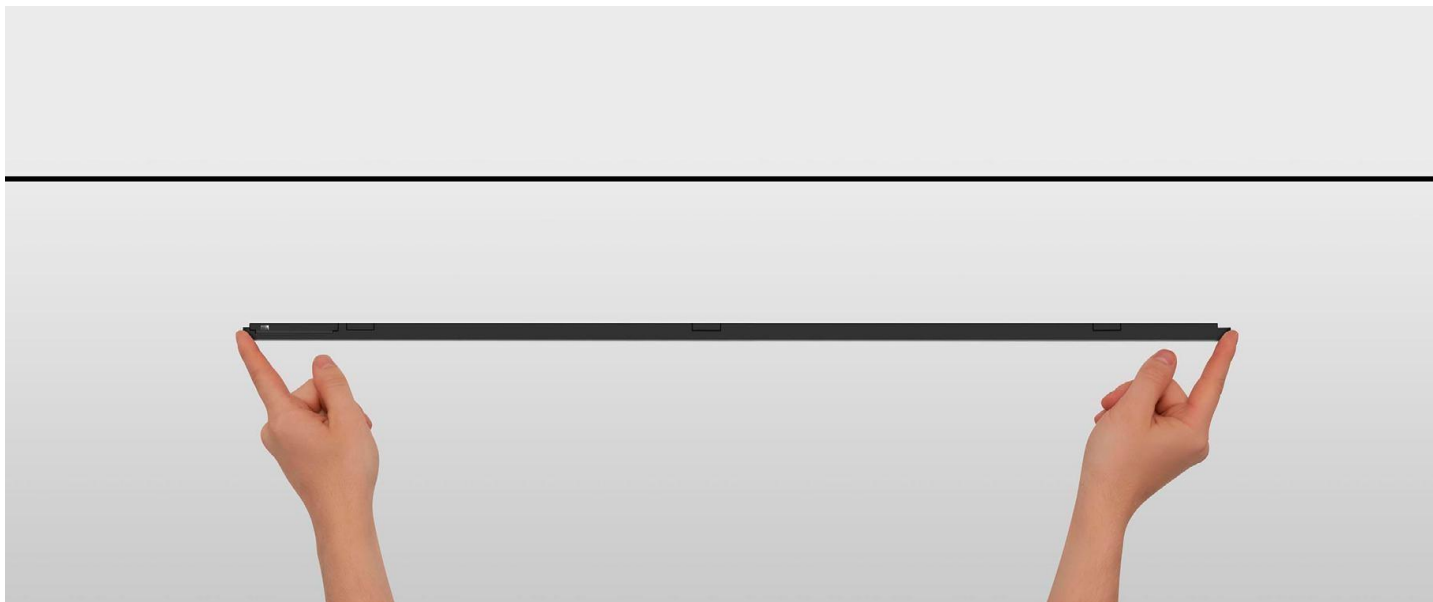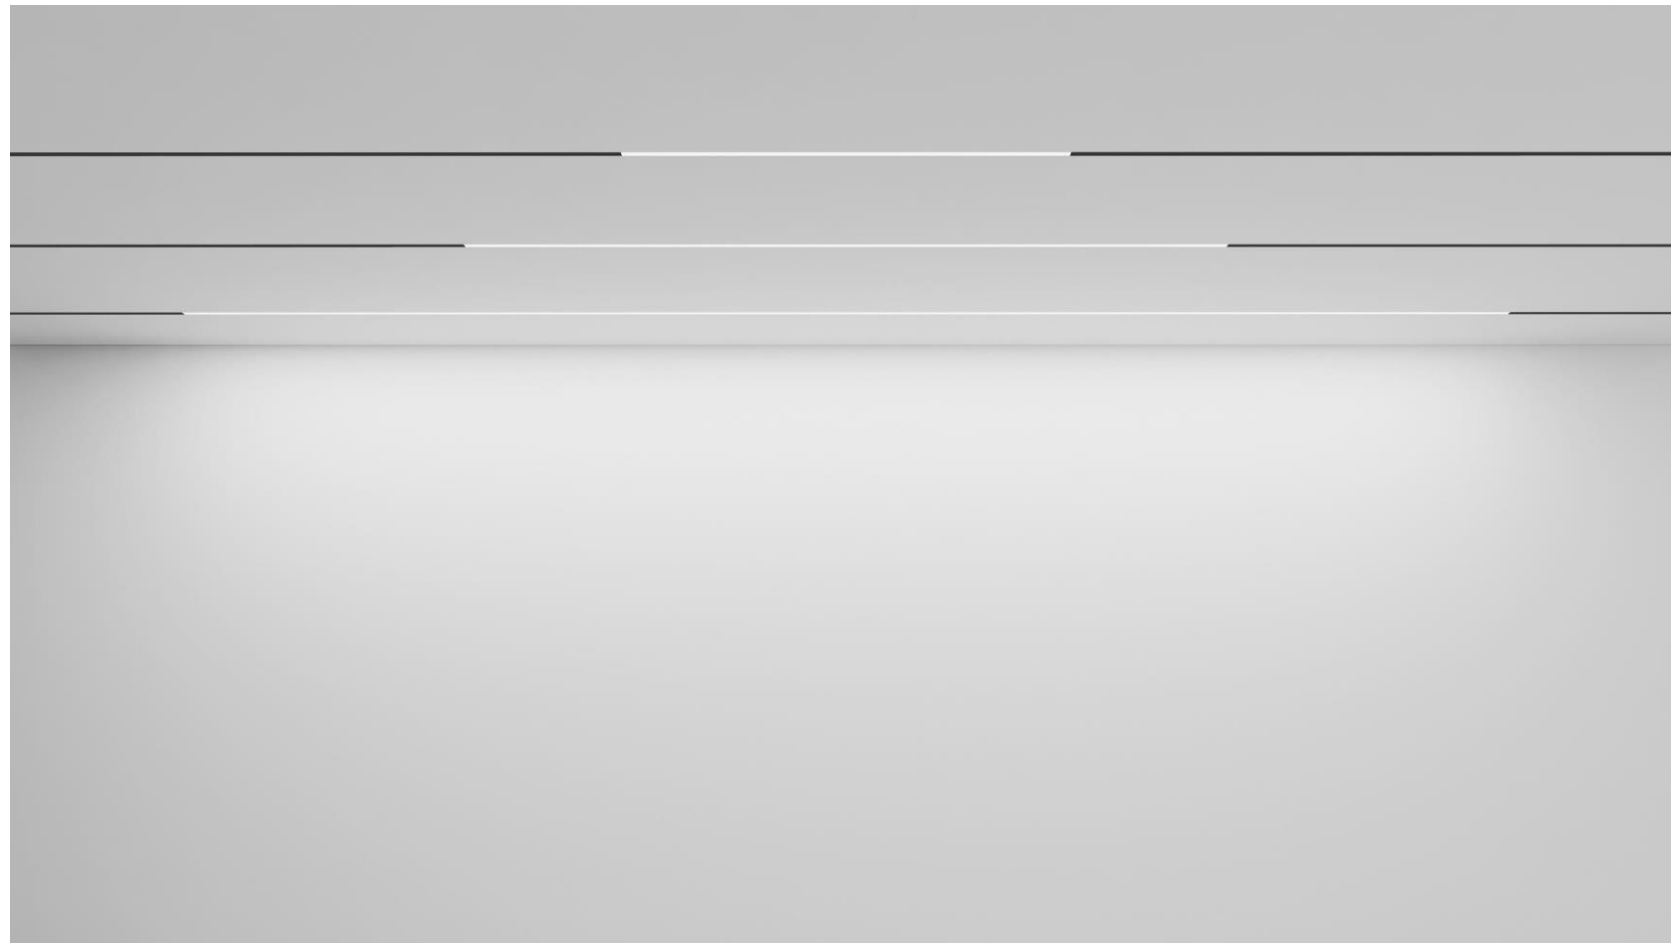



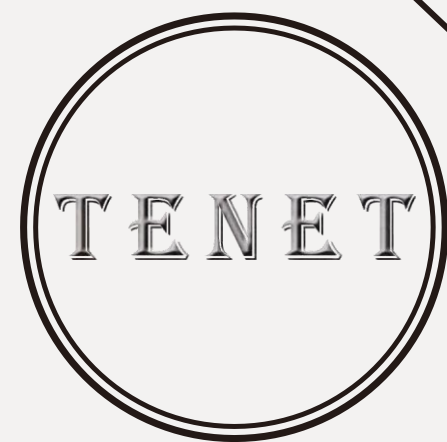

Integrity

No perfect products, but keep improving the process.

Quality

Quality comes first, all staff members make concerted efforts, to provide high quality, creditable products with low cost, and eventually satisfy our clients.

Passion

Spending more time and energy in our working with passion is a very important factor to our success.

Innovation

Innovation in management and technology is the driving force of our development.

Return

Creditability comes first, we pursue sustainable operation and continuous improvement, to reward the society with excellent products.

CREATIVE & CUSTOMIZED LIGHTING COMPANY

With the features of compatibility, particular optical design and precise light control, our products will always fit for the lighting trends.

